WPH-DC Probe
DC – 40 kHz

- Magnetic field measurement from DC to 40 kHz.
- Isotropic & True RMS measurement
- Static and time-variable fields
- Spectrum analysis probe up to 40 kHz.
- Measurements in accordance with International Standards
- Numerous static field limits (ACGIH, ICNIRP, EU, EMFV, EN 45502-2-1), accounting for exposure for Pacemakers/AIMDs, General population, occupational levels, limbs, projectile effects and many more scenarios.

DC – 40 kHz
H
RMS
ISOTROPIC



Medical
(Magnetic resonance in hospitals) – IEC 60601-2-33

Magnets
Strong permanent magnets (Heavy duty magnet lifters)

Energy
(DC generators, DC motors, etc) – IEC/EN 62110

Railway
(DC powered railroads, etc) – IEC 62597, EN 50500

Industry
Low frequency industrial application (Magnetizers, electrolysis, etc).

Automotive
Electric vehicles

Workers Safety
Especially cardiac pacemaker and other AIMDs users



Technical Specifications

Part Number	WWP1501
Frequency range	DC (0 Hz) – 40 kHz
Field type	Magnetic Field
Field Sensor	Triaxial Hall sensor
Selectable Bandwiths	Low: DC – 20 kHz Full: DC – 40 kHz
Measurement range (DC+AC)*	10 µT – 10 T
Overload/Damage level	20 T
Dynamic range	> 120 dB
Frequency Response	±1.5 % (0 Hz – 30 kHz) +3 % @ 40 kHz
Noise level	< 5 µT
Isotropy	< 3 %
Temperature deviation	0.002 dB/°C (-15 °C to +50°C)
Linearity	0.6 % (100 µT – 1 T) 1 % (100 µT – 2.4 T) 0.5% (30 µT - 2000 µT @50 Hz)
Typical expanded uncertainty	< 4.5 % (< 0.38 dB)
Temperature - Operating - Storage	 -20 °C to +55°C -30 °C to +75°C

*This measurement range applies to DC - 150 Hz



WPH-DC_EN_2609_v2.3

WAVECONTROL
Safety, Quality, Service

Wavecontrol S.L.
Barcelona, Spain
+34 933 208 055
info@wavecontrol.com

Wavecontrol Inc.
New Jersey, USA
+1 201 479 9022
sales@wavecontrol.com

Product specifications and descriptions in this document subject to change without notice

WPH-DC Probe
DC - 40 kHz

Technical Specifications

Relative humidity	5 to 95 %, non-condensing
Weight	90 g
Probe size	273 x Ø 21 (mm) - Sensor stick Ø 9.4 (mm)
Operation (display unit)	Compatible with the SMPx device (dual or selective).
Calibration	ISO 17025 ILAC-ENAC accredited calibration 24 months recalibration period (recommended)



Measurement Range

DC Range	
Frequency range	0 Hz to 1 Hz
Filter	Low-pass FIR filter with cut-off @ 1 Hz (-3 dB)
Measurement range	10 µT – 10 T
Limits	ICNIRP, EU, ACGIH, EMFV, EN 45502-2-1 and many more (for Pacemakers/AIMDs, General population, occupational levels, limbs, projectile effects, etc).
Reading update time	500 ms (selectable options for log time)
Graphical display	Total field value time plot (instantaneous and average field values vs time)
Result type	Total static field (instantaneous, maximum, minimum, average) and axis information. Units in µT, mT, T, mG, G, A/m, % H (Static field limits)

AC Range	AC	AC + DC
Frequency range	1 Hz – 40 kHz	DC – 40 kHz
Filter	High pass IIR 2nd Order filter @1 Hz	No filter
Result type	RMS, Peak, FFT and axis information. Units in µT, mT, T, mG, G, A/m	

Wavecontrol S.L.
Barcelona, Spain
+34 933 208 055
info@wavecontrol.com


Wavecontrol Inc.
New Jersey, USA
+1 201 479 9022
sales@wavecontrol.com

Product specifications and descriptions in this document subject to change without notice

WPH-DC Probe
DC - 40 kHz

Time Domain Mode				
Measurement range	10 µT – 10 T (DC - 150 Hz) Upper range decreases linearly with increasing frequency above 150 Hz. See graph below.			
Graphical display	Total field value (RMS and Peak) time plot			
Noise level	5 µT			
FFT Mode				
Measurement range	1 µT - 10 T (DC - 150 Hz) Upper range decreases linearly with increasing frequency above 150 Hz. See graph below.			
Graphical display	Frequency analysis (real-time), total field and axis.			
SPAN (resolution)	40 Hz	400 Hz	4 kHz	40 kHz
Frequency range	0 – 40 Hz	0 – 400 Hz	0 – 4 kHz	0 – 40 kHz
Resolution	0.1 Hz	1 Hz	10 Hz	100 Hz
RBW	0.15 Hz	1.5 Hz	15 Hz	150 Hz
Noise level	0.15 µT	0.25 µT	0.06 µT	0.02 µT
Number of FFT points	400 points			

AC Measurement Range Graph:

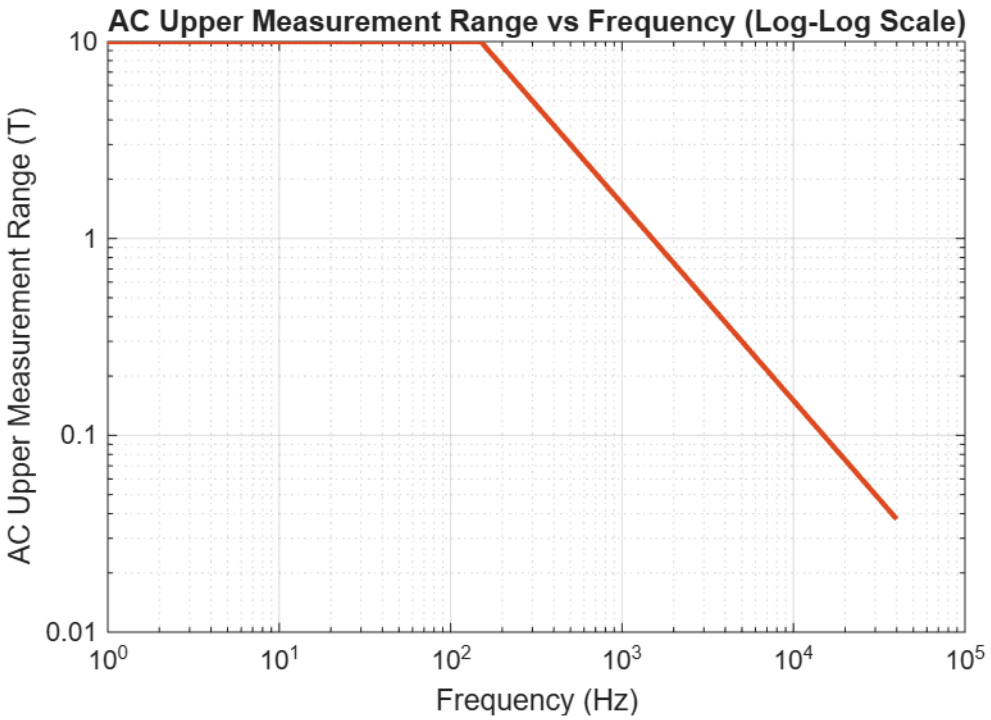

Wavecontrol S.L.
Barcelona, Spain
+34 933 208 055
info@wavecontrol.com

Wavecontrol Inc.
New Jersey, USA
+1 201 479 9022
sales@wavecontrol.com

Product specifications and descriptions in this document subject to change without notice

WPH-DC Probe
DC - 40 kHz

Accessories

Accessories	
Zero Gauss Chamber	PBL0018
Optional Accessories	
Fiber optic cable + converter USB to PC	WSNA0004 (10 meters) WSNA0015 (20 meters) WSNA0010 (45 meters)
Probe extension cable for LF H field measurement (recommended)	WSNA0011 (5 meters) WSNA0014 (2 meters)
Probe support for tripod (Recommended with the probe extension cable)	WSNA0013






Axes Position

Axis X



Axis Y



Axis Z



Wavecontrol S.L.
Barcelona, Spain
+34 933 208 055
info@wavecontrol.com

Wavecontrol Inc.
New Jersey, USA
+1 201 479 9022
sales@wavecontrol.com

Product specifications and descriptions in this document subject to change without notice